

# Borough of Roselle Park

## Deck Requirements

A completed construction permit application, including:


- Construction Permit Application Folder
- Building Subcode Technical Section
- Zoning Permit Application
- Application for Certificate

Submit two (2) sets of plans that are clear and legible. To draw your own plans, you must be the owner and occupant of the property. If not, you will need drawings by a New Jersey Registered Architect. **The homeowner's signature must be on the plans that they prepare and Certification In Lieu of Oath in the Construction Permit Application Folder.**

Townhome and multi-family type structure plans are required to be designed by a NJ Licensed Architect.

The drawings submitted shall include the following information:


1. Length, width and height above grade. Provide type of lumber (A.C.Q. treated lumber, cedar, or other naturally durable product)
2. Provide footing locations: Distance from house or structure and between each other. Minimum footing size to be 12" wide and 36" below finished grade.
3. Provide support column size and spacing: (4x4) for deck heights up to 6' and (6x6) post for deck greater than 6' above finished grade. Columns to be anchored to footing using a proper post saddle or equivalent type anchor. Column cannot be encased in concrete.

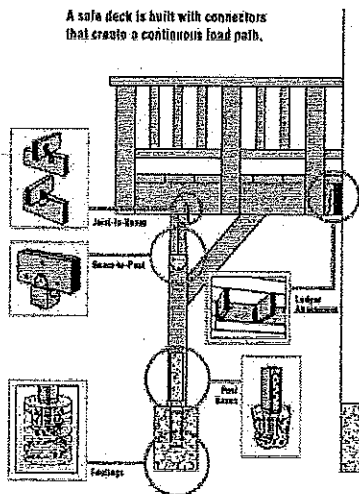


Revised 6/2016




- Decking: Exterior wood and plastic composite deck boards shall be installed in accordance with manufacturer's specification. **2 copies of manufacturer installation specs shall be provided with application for resurfacing of existing deck structures only.**
- Flashing: Provide continuous corrosion-resistant flashing along ledge in such a manner as to prevent the passage of moisture into the wall, any untreated wood or wood siding. **(Exception)** Not required if against vinyl siding, metal siding or masonry. In this case provide shims as not to crush siding when bolts are tightened.

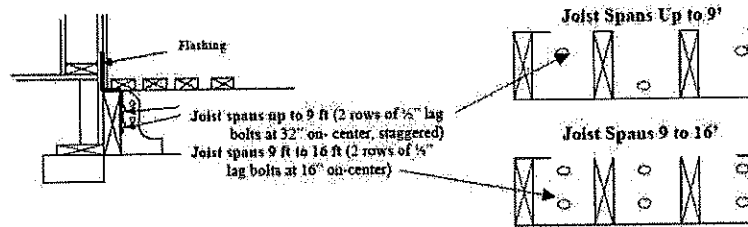


- Guards: Walking surfaces and open sides of stairs more than 30" above grade shall have guards not less than 36" measured vertically from the **stair nosing** and not less than 36" above a **walking surface**. Balusters or spindles shall be constructed so a 4" sphere cannot pass. **(Exception:** The triangular opening at the bottom rail of a guard and stair shall not allow the passage of a 6" sphere. Guards shall be constructed to withstand a 200 pound load in any direction along the top rail.

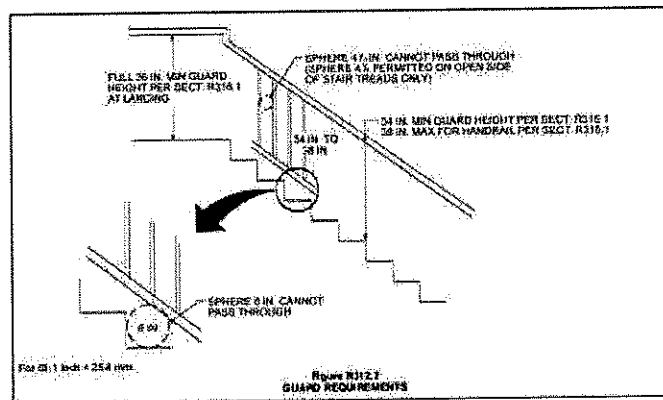


- Stairways: Minimum stairway width is 36", maximum riser height is 8 1/4", minimum tread is 9". A nosing not less than 3/4" but not more than 1 1/4" shall be provided when solid riser are used. Stairways more than 12' above floor level or grade required a landing.

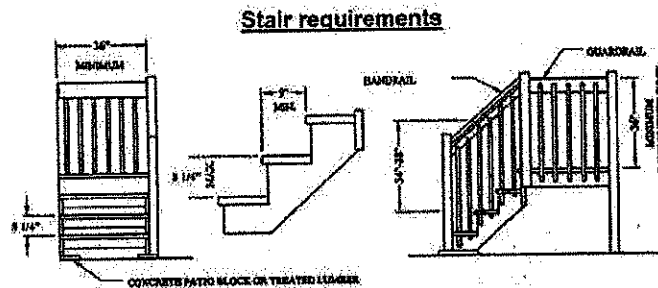

11. Handrails: All stairways with four or more risers require continuous handrails. Handrails shall not be less than 30" or greater than 38" measured vertically from the stair nosing. Handrails shall be continuous the full length of the stairs. Handrails shall be returned or shall terminate to a wall or post. Grip sizes shall be in accordance with the 2015 International Residential Code, New Jersey Edition, Section R311.7.8.3. Type I or II.

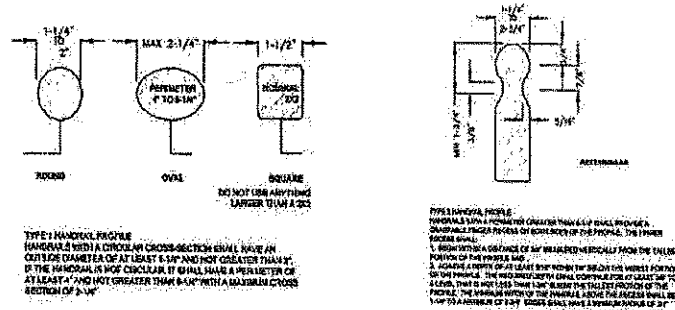

12. Lateral Bracing: If the deck is far enough above ground to cause it to sway, diagonal bracing is to be installed between girder and posts.
13. Connectors: All connectors, nails, screws, bolts and related hardware shall be hot-dipped zinc coated (galvanized), stainless steel, silicon bronze, copper or other corrosion resistant materials. When using hangers (TECO) all round holes must be filled using (TECO) nails.

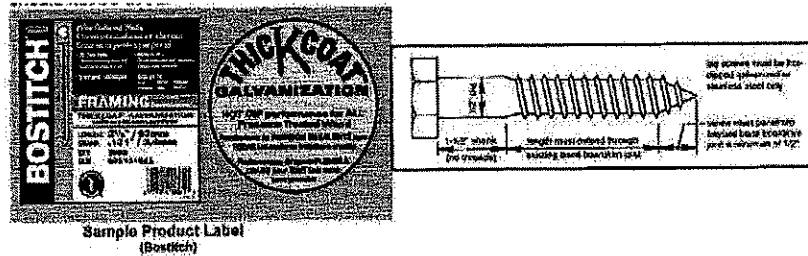


14. Required inspections: Call (908) 709-7213 between the hours to 8:00 a.m. and 4:30 p.m. to schedule inspections.

- Footing Inspection:** before the placing of any concrete
- Framing Inspection:** prior to installing decking and after all footings have been poured, columns, girder and floor joist have been installed. All flashing to be in place, all TECO slots nailed, ledger board lag bolted and all columns secured to footings girder/floor joist nailed to code.
- Final Inspection:** when all decking, guardrails, stairs and graspable handrails are installed and completed for issuance of a Certificate of Occupancy.

**Failure to request required will result in a penalty being issued to the owner and/or contractor**

**VERY IMPORTANT!**

You must leave your copy of the plans *ON THE JOB SITE* for all inspections. You do not have to be home for these inspections if you leave access to the area and leave the plans for the inspector. Please keep all pets locked up when you know the inspector will be at your home.

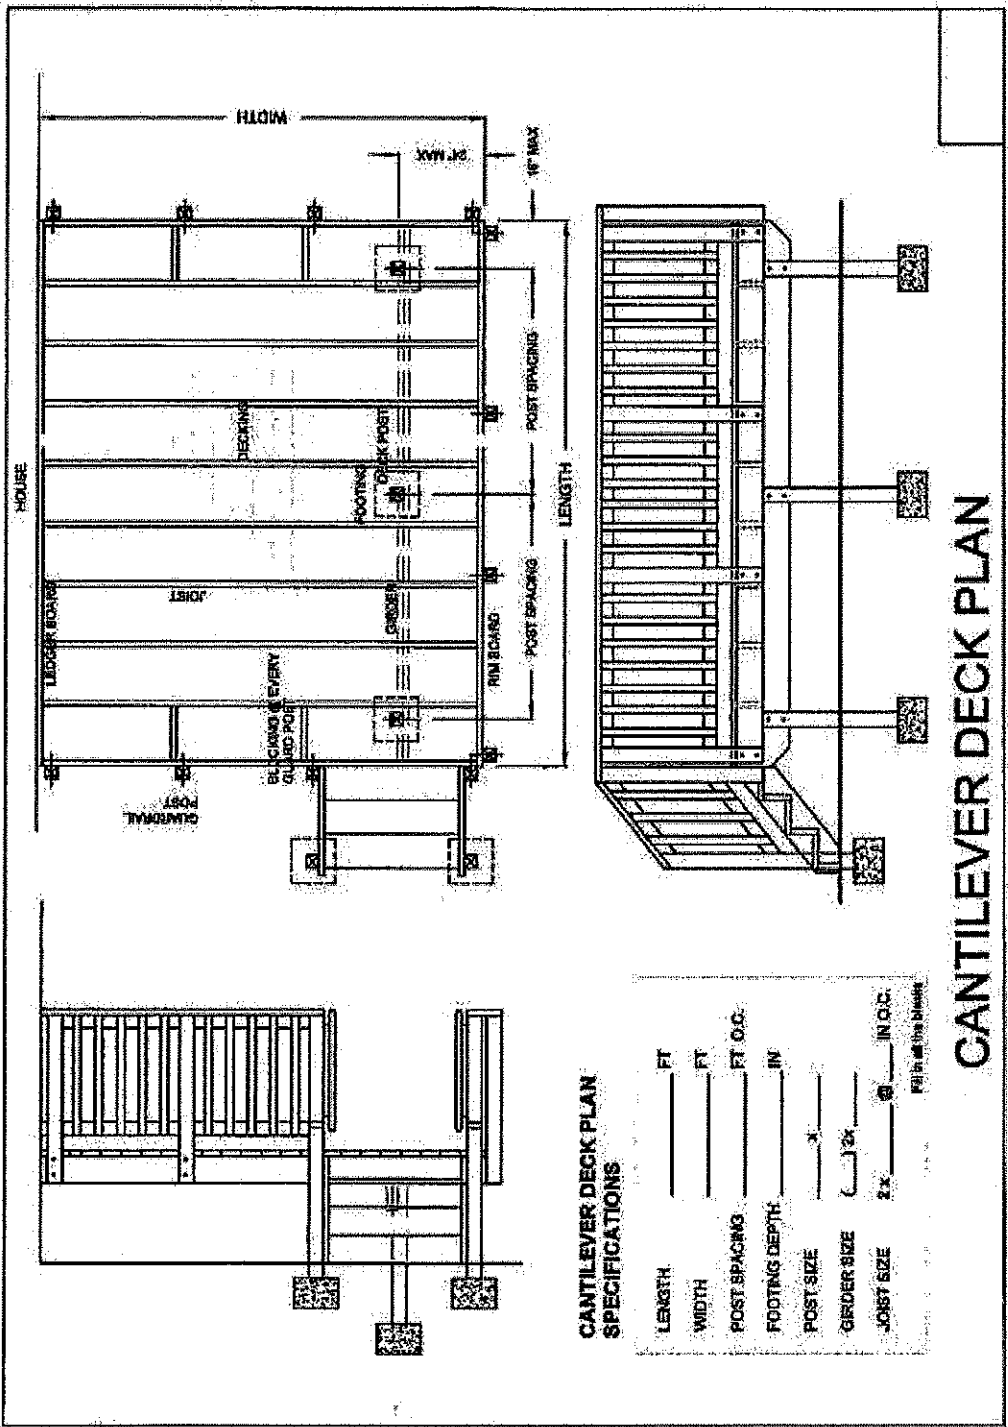

**CANTILEVER DECK PLAN SPECIFICATIONS**

LENGTH	_____	FT
WIDTH	_____	FT
POST SPACING	_____	FT O.C.
FOOTING DEPTH	_____	IN
POST SIZE	_____	x _____
GRIDER SIZE	_____	x _____
JOIST SIZE	_____	x _____
		IN O.C.

Fill in the blanks

**CANTILEVER DECK PLAN**